



MANUFACTURERS OF FIBRE BONDED CARPETS

MADE IN THE UK. MADE TO LAST.

EDUCATION | RESIDENTIAL | COMMERCIAL



FIBRE BONDED CARPETS AND TILES

CREATIVE RANGE CARPET TILES

ENTRANCE & TRANSITION CARPETS AND TILES

SPECIALIST CARPETS, TILES & MATS

SECTOR EXPERTISE Including information on RIBA-accredited CPDs

TECHNICAL

CONTACTS

| Supacord Broadrib Hobnail Iron Duke Wellington Velour | 6 10 12 14 16 |
|---|----------------------------------|
| Array Odyssey | 20 24 |
| Battleship/Hippo Dreadnought Diamond Vanquisher Zephyr Sticks & Stones | 30 34 36 38 40 40 |
| Bespoke Logo Wellington Loose Lay Classroom Mats Expo Tiles Fusion | 44 46 46 48 |
| Education Apartments Architecture & Development | 52 54 56 |
| | 58 |
| | 59 |

FIBRE BONDED

Tes

- SUPACORD
- BROADRIB
- HOBNAIL
- IRON DUKE
- WELLINGTON VELOUR












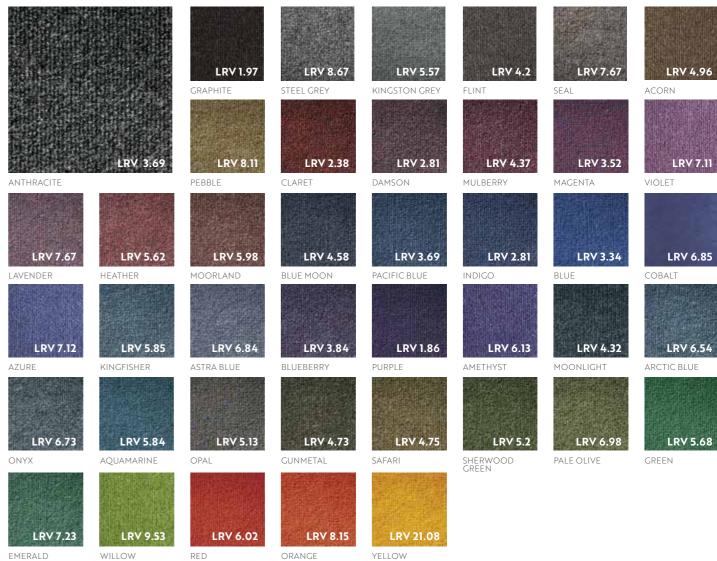

| Specification | Supacord | | 10 YEAR WEAR WARRANTY |
|------------------------|---|--------------------------------------|--------------------------|
| Fibre Construction | 80% Polypropylene, 15% I | Polyamide, 5% Recycled Po | lyester |
| Colour Fastness | Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5 | | |
| Flammability | (BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Cfl-s1 (Sheet), Class Bfl-s1 (Tile), Class Bfl-s1 (Acoustic Tile), Class Cfl-s1 (Plank) | | |
| Antistatic | Suitable for use in compu | uter rooms | |
| Impact Noise Reduction | BS EN ISO 140-8: 19dB (Sheet and Tile) BS EN ISO 140-8: 22dB (Acoustic Tile) | | |
| Formats | Sheet | Tile 🔶 | Plank |
| Backing | - | Bitumen | Bitumen |
| Size | 2 metre and 4 metre, ribbing runs down length of roll | 50cm x 50cm | 100cm x 25cm |
| Tiles Per Box | - | 20 (5m²) Acoustic Tile - 16 (4m²) | 16 (4m²) |
| Weight | 1020gsm | 4020gsm Acoustic Tile - 4820gsm | 4020gsm |
| Thickness | 6.20mm | 7.60mm Acoustic Tile - 12mm | 7.60mm |


SUPACORD

Supacord is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.






BREEAM[®] 'A+' Rated

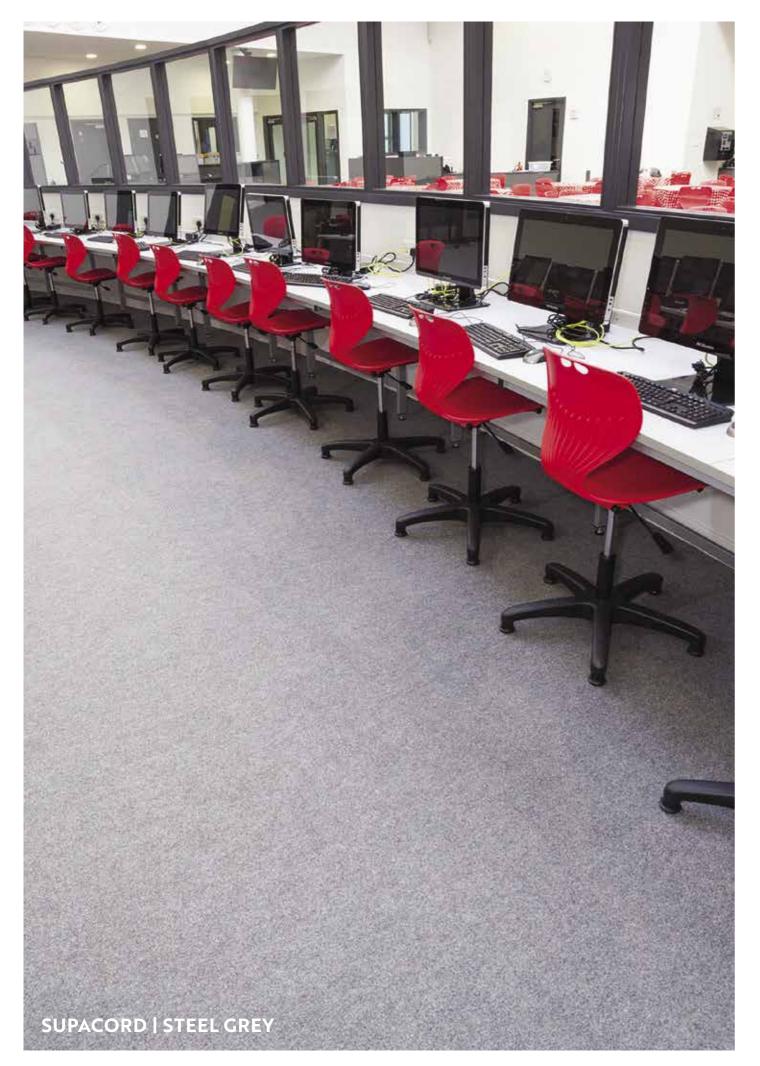



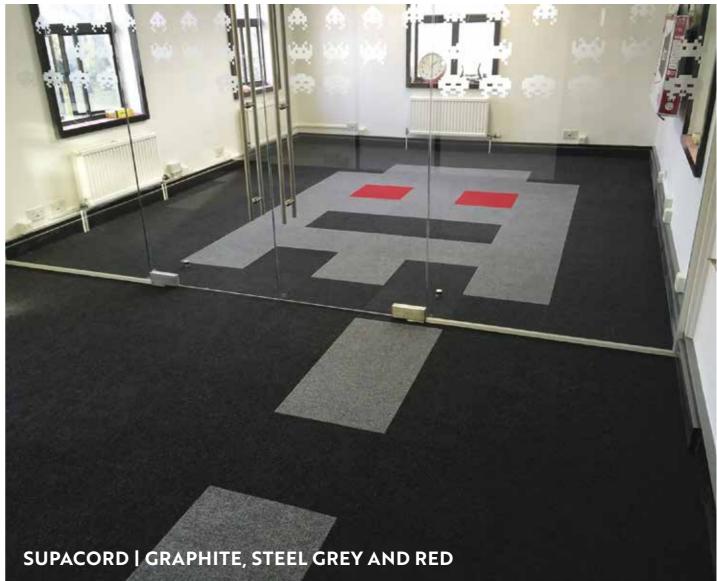



EMERALD

BLUEBERRY



Broadrib is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings. Its wider rib structure compared to Supacord, creates a more defined texture within the carpet.

| Specification | Broadrib | |
|------------------------|---|---|
| Fibre Construction | 80% Polypropylene, 15% F | Polyamide, 5% Recycled Po |
| Colour Fastness | Light (BS EN ISO 105:B02) Wet Rubbing (BS EN ISO Dry Rubbing (BS EN ISO 1 | 105:BO1) 5 |
| Flammability | (Hot Metal Nut Test) - Lov | labelling of Textile Floorco v Radius of Char (Sheet), Class Bfl-s1 (Tile), C |
| Antistatic | Suitable for use in compu | uter rooms |
| Impact Noise Reduction | BS EN ISO 140-8: 20dB (S BS EN ISO 140-8: 25dB (A | |
| Formats | Sheet | Tile 🔶 |
| Backing | - | Bitumen |
| Size | 2 metre and 4 metre, ribbing runs down length of roll | 50cm x 50cm |
| Tiles Per Box | - | 20 (5m²) Acoustic Tile - 16 (4m²) |
| Weight | 1020gsm | 4020gsm Acoustic Tile - 4820gsm |
| Thickness | 7.50mm | 8mm Acoustic Tile - 12.50mm |



WILLOW

PALE OLIVE



10



BREEAM[®] 'A+' Rated






ANTHRACITE













PURPLE


SEAL

GREEN

| Specification | Hobnail | |
|--------------------|--|---------------------|
| Fibre Construction | 80% Polypropylene, 15% Polyamide, 5% | 6 Recycle |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 | |
| Flammability | (BS5287) Assessment and labelling of T (Hot Metal Nut Test) - Low Radius of Cl BS EN 13501 - Class Cfl-s1 (Sheet), Class | nar |
| Antistatic | Suitable for use in computer rooms | |
| Formats | Sheet 🔵 | Tile 🔶 |
| Backing | - | Bitume |
| Size | 2 metre | 50cm x |
| Tiles Per Box | - | 20 (5m ² |
| Weight | 1020gsm | 4020gs |
| Thickness | 7.20mm | 8mm |

HOBNAIL

Hobnail is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings. Ideal in communal areas with a non-directional pattern.



FLINT



BLUE


LRV 3.35



ARABIAN RED



SHERWOOD



STEEL



COBALT



CLARET















BLUE MOON





LRV 9.45

LRV 3.51



LINCOLN GREEN

PETROL BLUE

PURPLE

WILLOW

| Specification | Iron Duke | |
|------------------------|---|---------------------|
| Fibre Construction | 80% Polypropylene, 10% Polyamide, 10 | % Recycl |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5 | |
| Flammability | (BS5287) Assessment and labelling of T (Hot Metal Nut Test) - Low Radius of C BS EN 13501 - Class Dfl-s1 (Sheet), Class | har |
| Antistatic | Suitable for use in computer rooms | |
| Impact Noise Reduction | BS EN ISO 140-8: 18dB (Sheet) | |
| Formats | Sheet 🔵 | Plank , |
| Backing | - | Bitume |
| Size | 2 metre and 4 metre | 100cm |
| Tiles Per Box | - | 20 (5m ² |
| Weight | 750gsm | 3750gsr |
| Thickness | 4.75mm | 6mm |



Iron Duke is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, retail outlets, and public sector buildings.



FLINT




BLUE



CLARET



CHESTNUT



DOVE GREY




AMETHYST



ARABIAN RED
















CHARCOAL





PETROL BLUE





TEAL BLUE

MARINE

LINCOLN GREEN

| Specification | Wellington Velour | 10 YEAR WEAR WARRANTY | |
|------------------------|---|-----------------------------------|--|
| Fibre Construction | 90% Polypropylene, 10% Recycled Po | yester | |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 | Wet Rubbing (BS EN ISO 105:BO1) 5 | |
| Flammability | (BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Efl (Sheet), Class Bfl-s1 (Tile) | | |
| Antistatic | Suitable for use in computer rooms | | |
| Impact Noise Reduction | BS EN ISO 140-8: 24dB (Sheet) | | |
| Formats | Sheet 🔵 | Tile 🔶 | |
| Backing | - | Bitumen | |
| Size | 2 metre | 50cm x 50cm | |
| Tiles Per Box | - | 16 (4m ²) | |
| Weight | 1180gsm | 4180gsm | |
| Thickness | 10mm | 11.20mm | |

WELLINGTON VELOUR

Wellington Velour is a heavy contract fibre bonded floorcovering and can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.

Combining a soft velour texture and high-traffic performance, creates a more defined texture within the carpet while enhanced Impact Noise Reduction properties aids building design.




KINGSTON GREY



AMETHYST



CLARET



DOVE GREY



SAPPHIRE





CREATIVE RANGE

ARRAYODYSSEY





ARRAY AND BROADRIB

ARRAY AND BROADRIB

ARRAY AND BROADRIB





LRV 2.04

LRV 4.58

LRV 3.56


LRV 1.78



ARRAY BLUE



BROADRIB BLUE



ARRAY FUCHSIA

BROADRIB FUCHSIA

BROADRIB GRAPHITE









LRV 5.94

ARRAY PURPLE

BROADRIB PURPLE

ARRAY RED

BROADRIB RED

| Specification | Array | |
|------------------------|--|----------|
| Fibre Construction | 85% Polypropylene, 15% Polyamide | |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5 | |
| Flammability | (BS5287) Assessment and labelling of T (Hot Metal Nut Test) - Low Radius of CH BS EN 13501 - Class Bfl-s1 (Tile), Class Cf | nar |
| Antistatic | Suitable for use in computer rooms | |
| Impact Noise Reduction | BS EN ISO 140-8: 22dB (Tile) | |
| Formats | Tile 🔶 | Plank _ |
| Backing | Bitumen | Bitumer |
| Size | 50cm x 50cm | 100cm > |
| Tiles Per Box | 16 (4m²) | 14 (3.5m |
| Weight | 4075gsm | 4075gsr |
| Thickness | 8.5mm | 8.5mm |



Array is a heavy contract fibre bonded floorcovering with a smart linear pattern in a choice of twelve vibrant shades that can be paired with Broadrib for effective design options. Array can be found in education, universities, libraries, apartment block communal areas, office environments, retail outlets, and public sector buildings.

F F



20 | Creative Range



ARRAY COPPER



BROADRIB ORANGE



ARRAY MARBLE





ARRAY MAGENTA



BROADRIB CERISE





ARRAY EMERALD



BROADRIB GREEN



ARRAY PEACOCK



BROADRIB PEACOCK




ARRAY VIOLET




BROADRIB VIOLET



BREEAM[®] 'A+' Rated

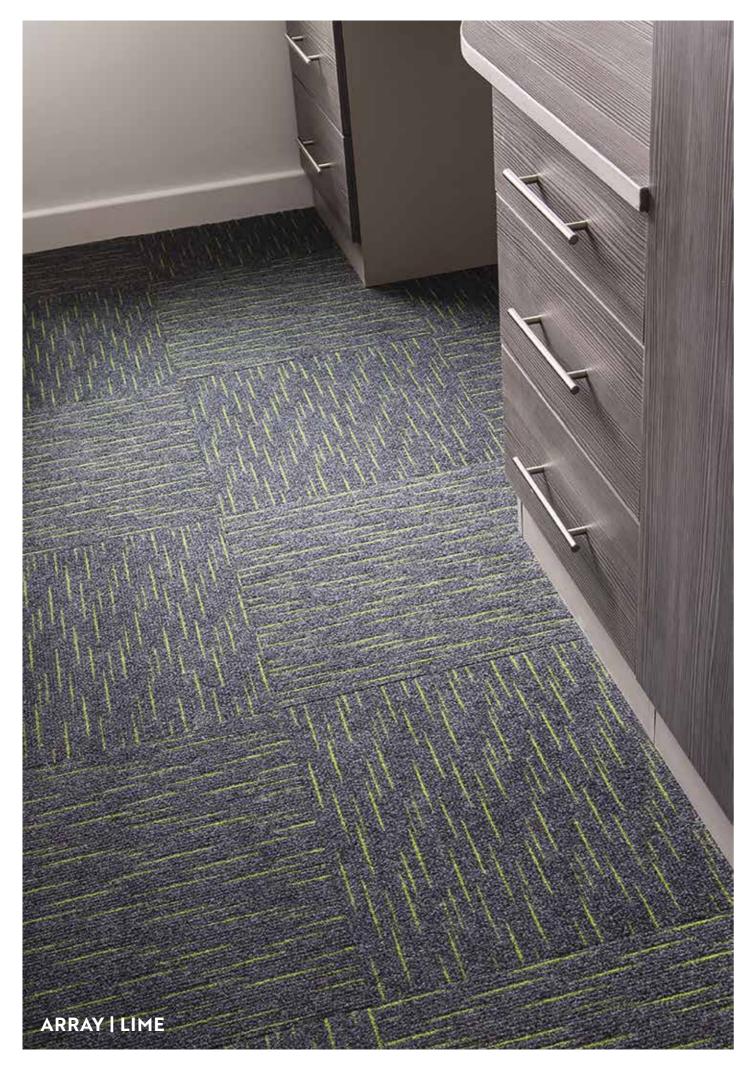

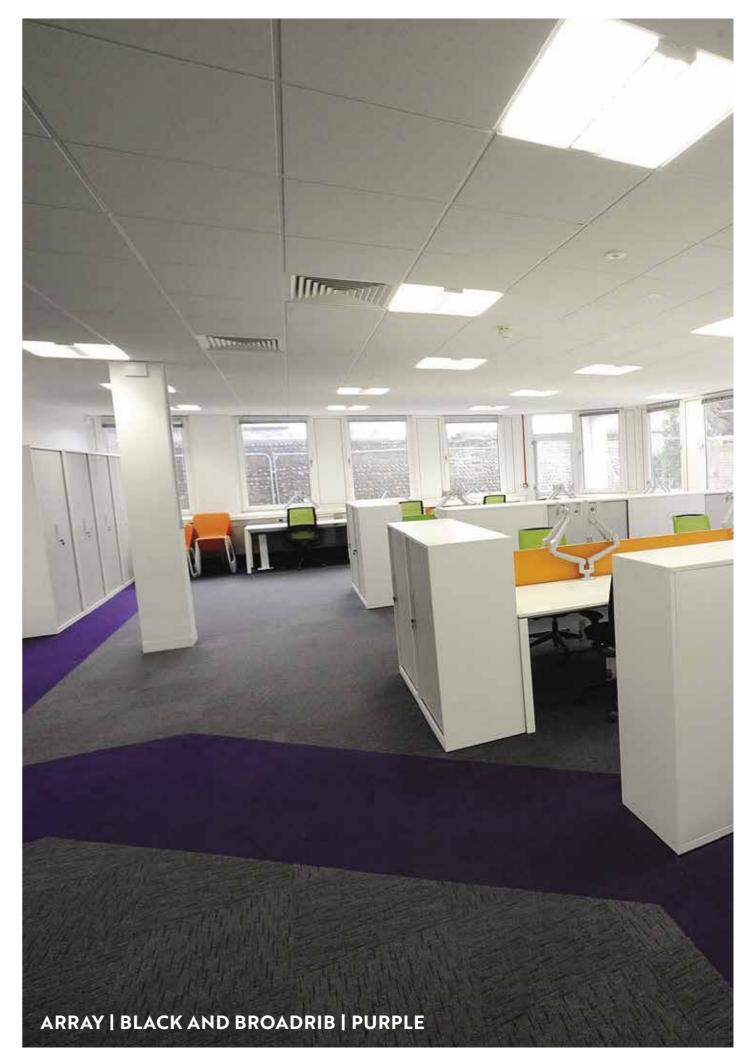









INDIGO



PACIFIC BLUE

| Odyssey |
|---|
| 84% Polypropylene, 16% Nylon |
| Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 |
| (BS5287) Assessment and labelling of Textile Flo (Hot Metal Nut Test) - Low Radius of Char BS EN 13501 - Class Bfl-s1 |
| Suitable for use in computer rooms |
| BS EN ISO 140-8: 20dB |
| Bitumen |
| Tile 🔶 |
| 50cm x 50cm |
| 16 (4m²) |
| 4200gsm |
| 8.5mm |
| |




Unique to the fibre bonded sector, **Odyssey** is a bold and modern carpet, ideal for commercial and education environments. Use the full 42 colourbank of Supacord to enhance your Odyssey design.




KINGSTON GREY





BLUEBERRY



Pair with the 42 colours of Supacord

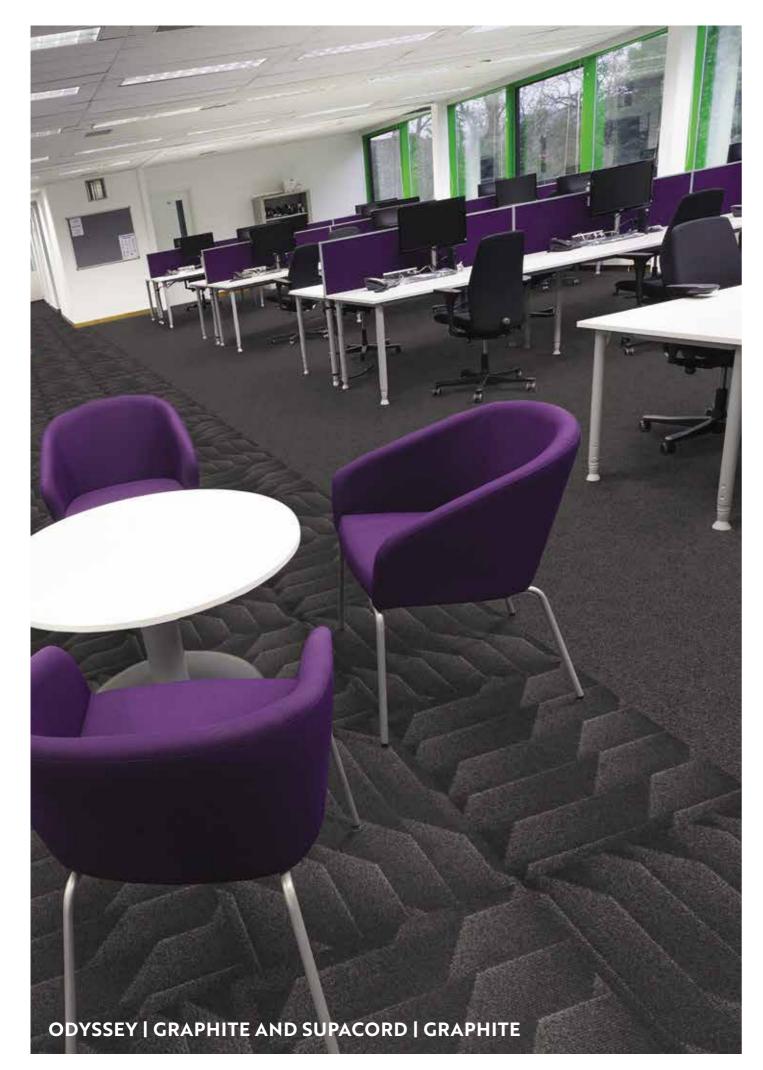

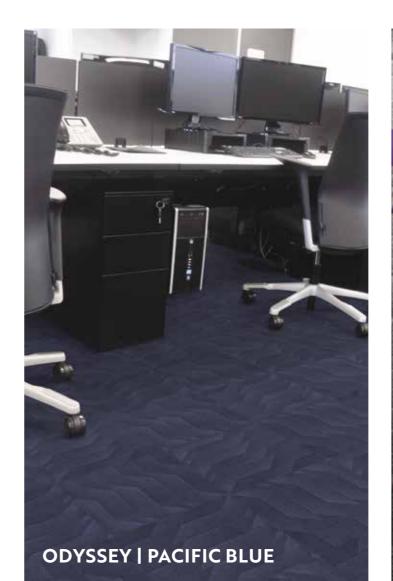

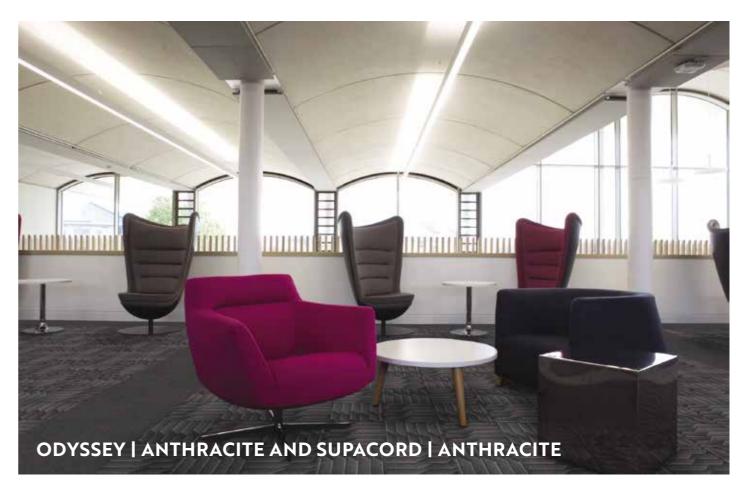

ODYSSEY | ANTHRACITE AND SUPACORD | PURPLE

ENTRANCE & TRANSITION AREA RANGE


- BATTLESHIP/HIPPO
- DREADNOUGHT
- DIAMOND
- VANQUISHER
- ZEPHYR
- STICKS & STONES










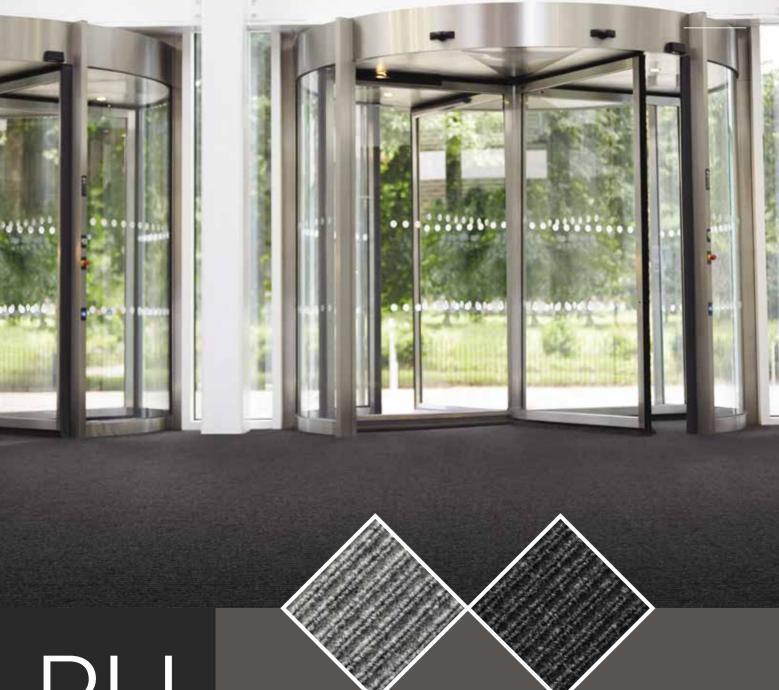





ASH GREY



BROWN

| Specification | Battleship/Hippo |
|--------------------|---|
| Fibre Construction | 90% Polypropylene, 10% Recycled Polyester |
| Colour Fastness | Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5 |
| Flammability | (BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl |
| Format | Sheet 🔵 |
| Backing | Unbacked (Battleship) / Rubber Waffle (Hippo) |
| Size | 2 metre and 4 metre, ribbing runs down length |
| Weight | 1495gsm (Battleship) / 2380gsm (Hippo) |
| Thickness | 10.50mm (Battleship) / 12mm (Hippo) |


BH

BATTLESHIP/ HIPPO **Battleship** and **Hippo** are heavy contract entrance solutions, used extensively in education and public sector buildings as well as entrance transition areas for apartment blocks. In addition, Hippo has a rubber waffle backing, allowing it to be loose laid in small areas or footwells.





HEATH




INDIGO







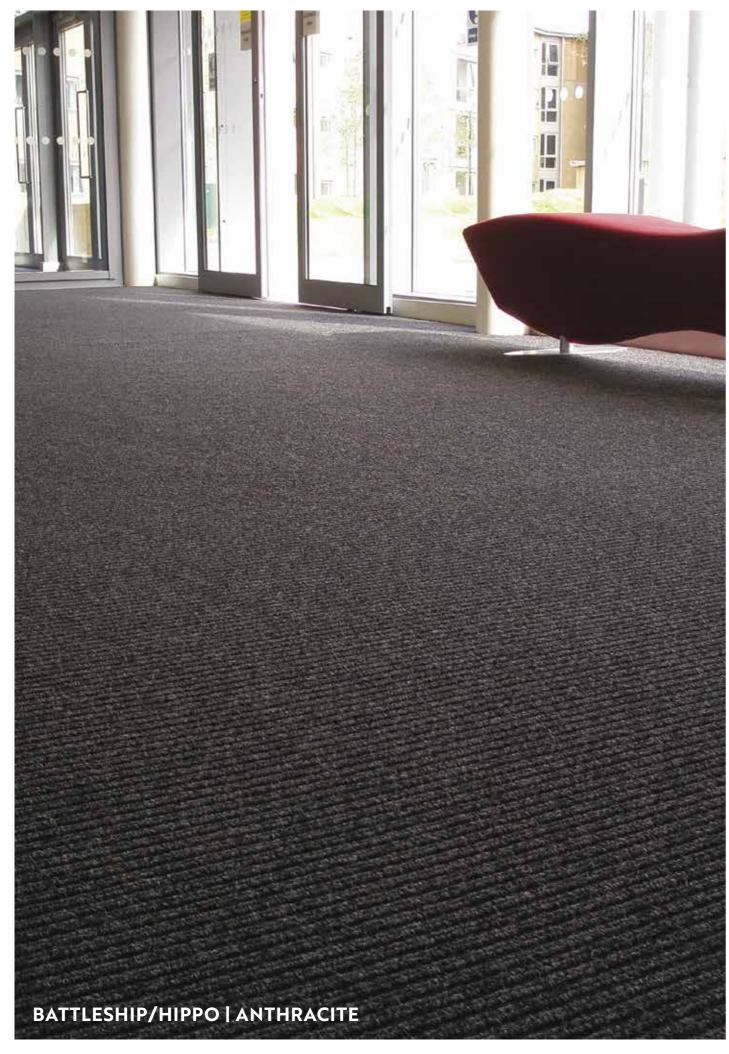









INDIGO

LINCOLN GREEN

| Specification | Dreadnought | |
|--------------------|---|-------------|
| Fibre Construction | 90% Polypropylene, 10% Recycled | d Polyester |
| Colour Fastness | Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) Dry Rubbing (BS EN ISO 105:X12) | |
| Flammability | (BS6307) Methenamine Pill Test - BS EN 13501 - Class Efl (Sheet and | |
| Formats | Sheet 🔵 | Tile 🔶 |
| Backing | - | Bitumen |
| Size | 2 metre, ribbing runs diagonally down length of roll | 50cm x 50ci |
| Tiles Per Box | - | 16 (4m²) |
| Weight | 1495gsm | 3995gsm |
| Thickness | llmm | 11.5mm |

DREADNOUGHT

A prominent, heavy contract, diagonal-ribbed texture results in a highly durable surface, a popular choice for use in schools, colleges, universities and offices as well as entrance transition areas for apartment blocks.








ASH GREY



FIESTA





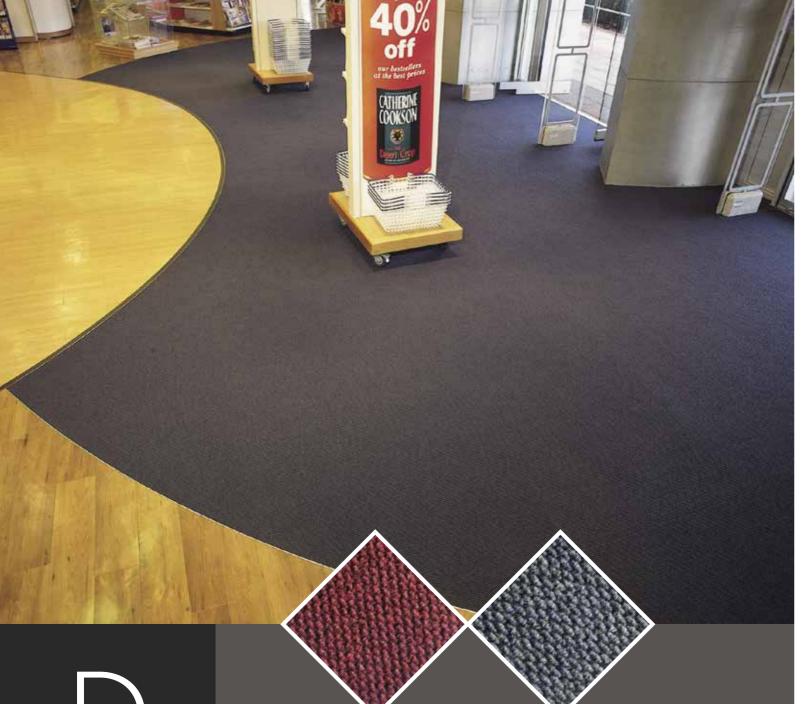

DIAMOND

A prominent, heavy contract, multi-directional texture results in a highly durable surface, a popular choice for use in schools, colleges, universities and offices as well as entrance transition areas for apartment blocks.


SHEET





CHOCOLATE









DOLPHIN BLUE

MOORLAND

SCARLET





BANK GREY

LAGOON

| Specification | Diamond | |
|--------------------|--|--------|
| Fibre Construction | 85% Polypropylene, 15% Recycled Polyes | ter |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 | |
| Flammability | (BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl (Sheet and Tile) | |
| Formats | Sheet 🔵 | |
| Backing | Rubber Crumb | Bitur |
| Size | 2 metre | 50cn |
| Tiles Per Box | - | 16 (41 |
| Weight | 2500gsm | 4400 |
| Thickness | 10.50mm | llmm |


SHEET AND TILE




CHARCOAL



INDIGO



EMERALD



SILVER



CRYSTAL BLUE



BEIGE








DEEP BLUE

| Specification | Vanquisher |
|--------------------|---|
| Fibre Construction | 100% Polypropylene |
| Colour Fastness | Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 |
| Flammability | (BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl |
| Format | Sheet 🔵 |
| Size | 2 metre, ribbing runs down length of roll |
| Weight | 1470gsm |
| Thickness | 11.50mm |



VANQUISHER

Vanquisher carpet is heavy contract and provides an alternative rib and velour surface pattern, specifically designed for use in entrance areas.

Available in four colours, Vanquisher carpet is used extensively in schools, colleges and universities, as well as retail, commercial environments and as entrance transition areas for apartment blocks.



ONYX



KINGFISHER







ZEPHYR



SILVER

STICKS & STONES



CHARCOAL

| Specification | Zephyr | | |
|--------------------|--|------------|--|
| Fibre Construction | 85% Polypropylene, 15% Recycled Polyester | | |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 | | |
| Flammability | (BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl (Sheet and Tile) | | |
| Formats | Sheet | Tile 🔶 | |
| Backing | - | Bitumen | |
| Size | 2 metre, ribbing runs down length of roll | 50cm x 50c | |
| Tiles Per Box | - | 16 (4m²) | |
| Weight | 1900gsm | 4400gsm | |
| Thickness | 10mm | llmm | |

| Specification | Sticks & Stones |
|--------------------|---|
| Fibre Construction | 85% Polypropylene, 15% Recycled Polyester |
| Colour Fastness | Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:BO1) 5 Dry Rubbing (BS EN ISO 105:X12) 5 |
| Flammability | (BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl |
| Format | Tile 🔶 |
| Backing | Bitumen |
| Size | 50cm x 50cm |
| Tiles Per Box | 16 (4m ²) |
| Weight | 4625gsm |
| Thickness | 13mm |

ZEPHYR

Ζ

Manufactured with a heavier weight fibre, heavy contract **Zephyr** is an enhanced hard-wearing carpet that can be installed in entrances, corridors and transition areas.

Sticks & stones

Heavy contract **Sticks & Stones** is a patterned hard-wearing carpet that can be installed in entrances, corridors and transition areas. LRV 6.77



INDIGO



5 YEAR WE


SPECIALIST CARPETS, TILES & MATS

Bespoke Logo

Wellington Loose Lay Classroom Mats

Expo Tiles


Fusion

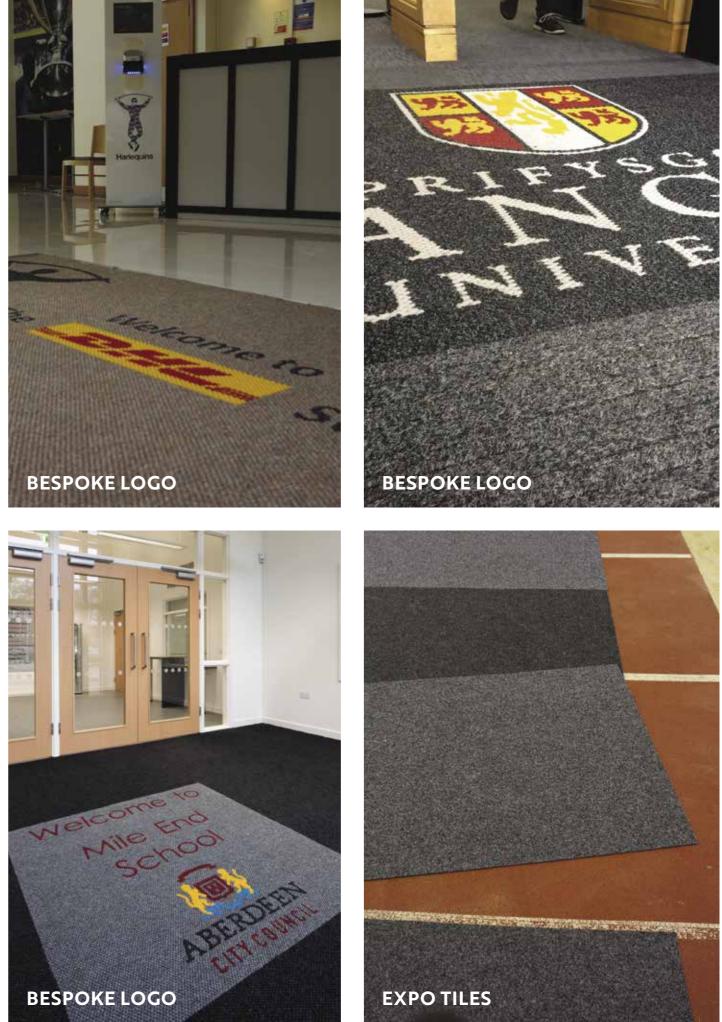











DOLPHIN







LAGOON

BEIGE

| Specification | Despoke Logo (Diamond) |
|--------------------|--|
| Fibre Construction | 85% Polypropylene, 15% Recycled Polyester |
| Colour Fastness | Light (BS EN ISO 105:B02) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5 |
| Flammability | (BS6307) Methenamine Pill Test - Pass BS EN 13501 - Class Efl |
| bize | Bespoke, contact Heckmondwike |
| Weight | 2550gsm |
| Thickness | 10.50mm |

BESPOKE logo

Make a lasting impression on clients, patrons or prospective students and create a bespoke carpet design or logo mat for your premises. Emblems, logos or slogans can be incorporated into a loose lay mat or inset into an entrance.



FLAMENCO



INDIGO



CHARCOAL



PURPLE



YELLOW



BLUE



BANK GREY




MOORLAND

WILLOW



AZURE BLUE



SILVER



WHITE



WELLINGTON LOOSE LAY CLASSROOM MATS






ANTHRACITE

CLARET



EXPO TILES

EXPO TILES



DRAGOON PETROL BLUE

DRAGOON ANTHRACITE

| Specification | Wellington Loose Lay (| |
|------------------------|---|--|
| Fibre Construction | 90% Polypropylene, 10% Re | |
| Colour Fastness | Light (BS EN ISO 105:B02) > Wet Rubbing (BS EN ISO 10 Dry Rubbing (BS EN ISO 10 | |
| Flammability | (BS5287) Assessment and la - Low Radius of Char | |
| Impact Noise Reduction | BS EN ISO 140-8: 24dB (She | |
| Format | Sheet material supplied as | |
| Backing | Rubber Waffle - also fitted | |
| Size | Bespoke (maximum size av | |
| Weight | 1880gsm | |
| Thickness | llmm | |

Please allow for 4cm on each side of the mat for ramped rubber edging.

| Specification | Expo Tiles |
|--------------------|--|
| Fibre Construction | 90% Polypropylene, 10% Re |
| Flammability | (BS6307) Methenamine Pill BS EN 13501 - Class Efl |
| Backing | PVC |
| Size | 2m x lm |
| Weight | 3625gsm |
| Thickness | 7mm |

Installation does not require adhesive or a professional flooring contractor. Tiles should be stored flat for optimum performance.

WELLINGTON LOOSE LAY MATS




WELLINGTON LOOSE LAY CLASSROOM MATS

The Wellington Loose Lay Classroom Mat range is ideal for education establishments. In classroom settings the rubber edged mat can be used as a quiet and comfortable reading area, communal play zone

EXPO TILES

or demarcated activities area.


Our versatile **Expo Tiles** allow you to transform a school hall, community centre or school sports hall into a fully-carpeted venue.



LRV 4.51

SAPPHIRE

LINCOLN GREEN



DRAGOON CHARCOAL

Classroom Mats

Recycled Polyester

>6 05:BO1) 5 05:X12) 5

labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test)

eet)

with rubber safety edging

vailable 4m x 4m)

Recycled Polyester

ll Test - Pass



F

FUSION

Fusion is the revolutionary new logo and way-finding tile. Use Fusion to brand your logo into a carpet tile or show direction by advising classroom numbers or room locations without additional signage.



Colourways Available in 4 products across over 50 colourways

| 19739 | 计算符 | 124 | | |
|-------|--------|-----|-----|-----|
| 10. M | 上有 | 中国 | | |
| 11534 | 4 18 | | | -66 |
| | 1 . T | | | |
| 3月4日 | 1.1324 | | 121 | 149 |

SUPACORD



ARRAY

BROADRIB







TTT ECTOR XPERTISE

A and

EDUCATION APARTMENTS ARCHITECTURE AND DEVELOPMEN









EDUCATION


ARRAY AND BROADRIB











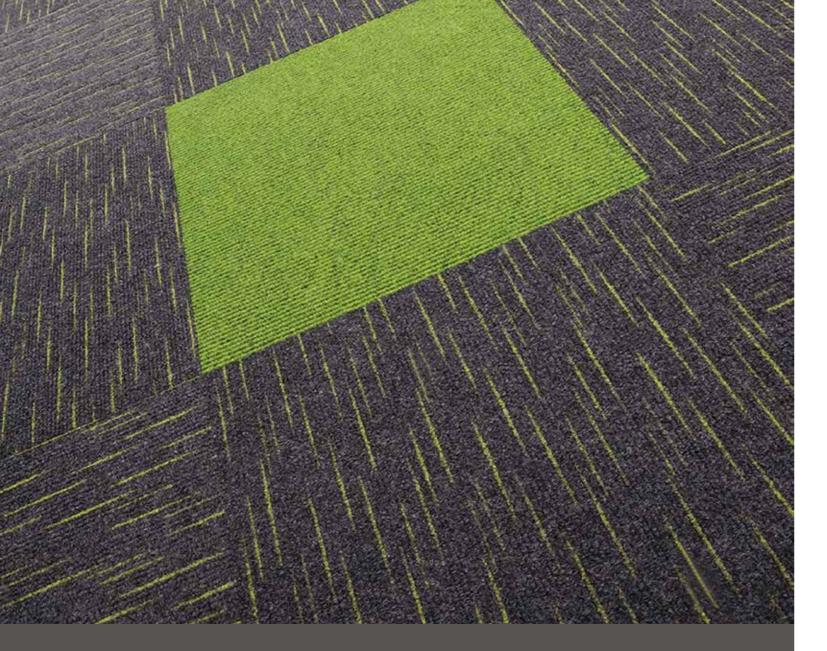

APARTMENT COMMUNALAREAS

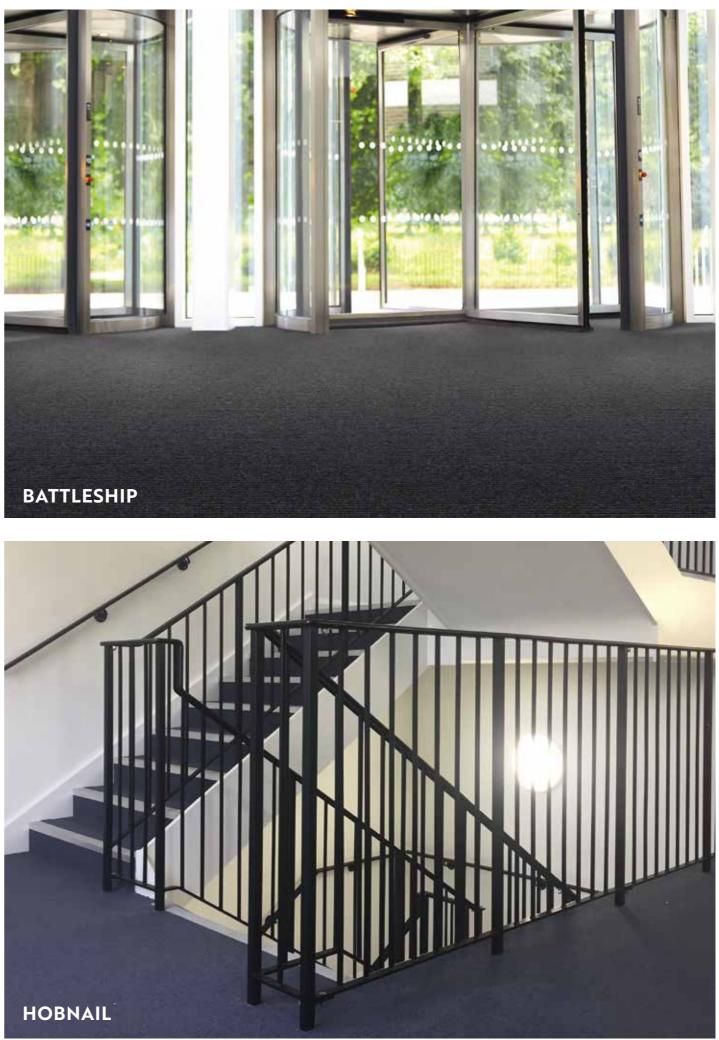

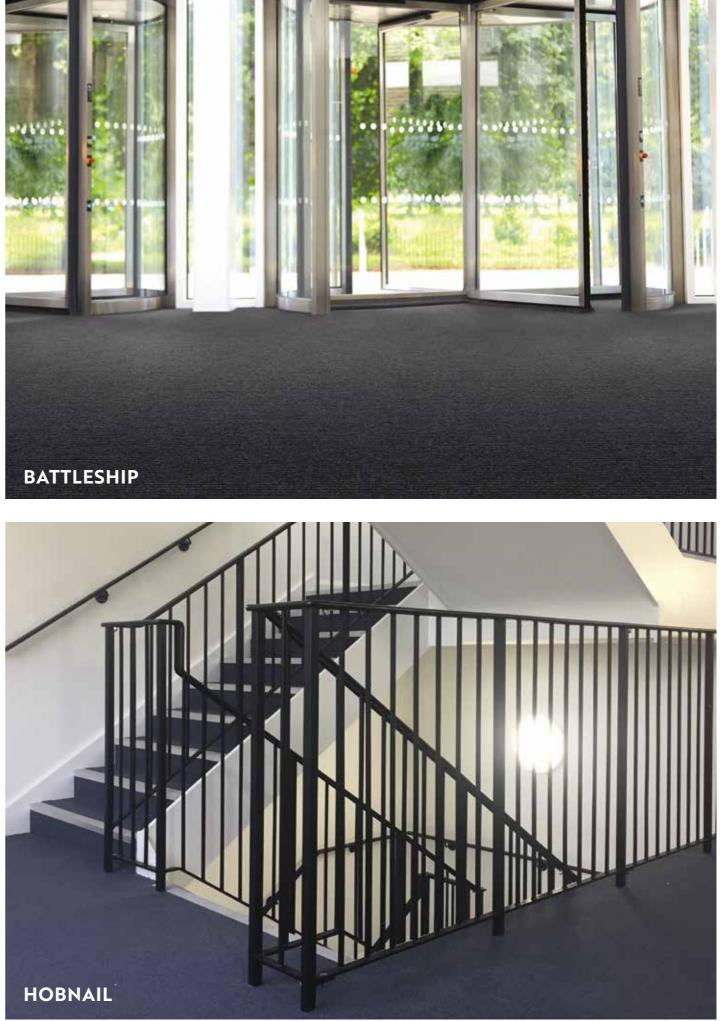



ARCHITECTURE & DEVELOPMENT

Looking to brush up on your knowledge of carpets and floor finishes?

We have developed a RIBA-accredited CPD that is perfect for the A&D industry, titled 'specifying fibre bonded carpets in the contract environment'.

Over the one hour 'lunch and learn' seminar, participants will learn:

- Factors to consider when specifying contract flooring
- Differences between sheet, carpet tiles and planks
- Manufacturing processes

• How fibre-bonded carpets meet legislation

Contact your local sales manager for further details.













You can find the resources for all of our products, from Specification data sheets to installation and maintenance guides on our website. For all information regarding:

- NBS PLUS
- LIGHT REFLECTANCE
- DECLARATION OF PERFORMANCE
- QUALITY MANAGEMENT
- INSTALLATION
- CLEANING AND MAINTENANCE

SALES

Tel: 01924 406161 Fax: 0800 136769 Email: sales@heckmondwike-fb.co.uk

TECHNICAL

Tel: 01924 413634 **Fax:** 0800 136769 **Email:** technical@heckmondwike-fb.co.uk

SAMPLES

Tel: 01924 413637 **Fax:** 0800 136769 **Email:** samples@heckmondwike-fb.co.uk

STACTS

Contacts | 59



Heckmondwike FB A division of National Floorcoverings Ltd. Wellington Mills, Liversedge West Yorkshire, WF15 7FH

sales@heckmondwike-fb.co.uk

Sales Office: 01924 406161 Admin: 01924 410544 Fax: 0800 136769 www.heckmondwike-fb.co.uk

FB_04_21